

Installing Your New Sling

Step 1: Remove the sliding loop from the sling.

Step 2: Pass the hook through the sling swivel on the trigger guard. Make sure the hook is facing away from the stock and heading toward the butt of the rifle. (see figure A)

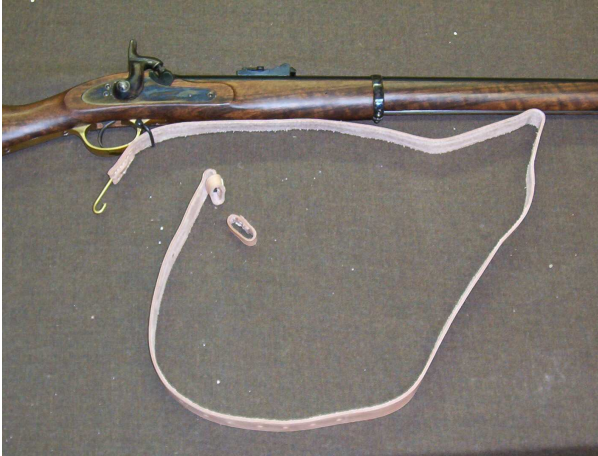


Figure A



Figure B

Step 3: Feed the hook through the standing loop that is sewn onto the sling at the opposite end of the hook. Pull the sling all the way through so the standing loop is tight against the trigger guard sling swivel. (see figure B)

Step 4: Put the sliding loop back onto the sling and slide it all the way down to the standing loop.

Step 5: Pass the hook through the upper sling swivel making sure that the hook is facing away from the stock. (see figure C)



Figure C



Figure D

Step 6: Fasten the hook in one of the holes. Position it comfortably for slinging on your shoulder. Then slide the sliding loop up the sling to the upper sling swivel. (see figure D)

Step 7: When the rifle is not slung, slide the standing loop toward the muzzle of the rifle to make the sling tight on the stock. (see figure E)



Figure E

Your sling is now ready for service!

If you need any further assistance please feel free to contact us at
The Regimental Quartermaster

Mail Order
3069 Edison Furlong Rd
Furlong, PA 18925
(215)340-1863

Retail Shop
49 Steinwehr Ave.
Gettysburg, PA 17325
(717)338-1864

You can visit us on the web at
www.reg tqm.com